Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Version POLLUTION INCIDENT RESPONSE 2.8 MANAGEMENT PLAN - COSTINS PIT QUARRY - RIDGE ROAD COOLAGOLITE

Directorate	Assets and Operations
Responsible Officer	Director Works and Assets

Table of Contents

Purpose	2
Environment Protection Licence Details	2
Incident notification	3
Description and likelihood of hazards	4
Pre-emptive actions to be taken	5
Inventory of pollutants	7
Safety Equipment	7
Communicating with neighbours and the local community	8
Actions to be taken during or immediately after a pollution incident	10
Severe Weather Event	12
Staff training	13
Testing of PIRMP	13
Owners or occupiers of premises in the vicinity of the of the quarry, 183 Lyrebird Ridge Road COC	DLAGOLIT

Owners or occupiers of premises in the vicinity of the of the quarry, 183 Lyrebird Ridge Road COOLAGOLITE 16

TRIM F16/185 Page **1** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Purpose

Bega Valley Shire Council holds an Environment Protection Licence with the NSW Environment Protection Authority for Costins Pit Quarry. As per the Protection of the Environment Operations Act (1997) (the "POEO Act"), the holder of an environment protection licence must prepare, keep, test and implement a pollution incident response management plan that complies with Part 5.7A of the POEO Act in relation to the activity to which the licence relates.

If a pollution incident occurs in the course of an activity so that material harm to the environment (within the meaning of section 147 of the POEO Act) is caused or threatened, the person carrying on the activity must immediately implement this plan in relation to the activity required by Part 5.7A of the POEO Act.

A written copy of this plan must be kept at Costins Pit Quarry, Ridge Road Coolagolite and be made available on request by an authorised NSW Environment Protection Officer and to any person who is responsible for implementing this plan.

NOTE: This plan must be developed in consultation with:

NSW EPA's "Environmental guidelines: Preparation of pollution incident response management plans"; and The Protection of the Environment Operations Act 1997 and the Protection of the Environment Operations (General) Regulation 2009.

Environment Protection Licence Details

Environment Protection Licence Details		Pollution incident – Person/s responsible:	
Name of Licensee: Bega Valley Shire		PLAN ACTIVATION	Deon Constance
	Council		Quarry Supervisor
			0427 260 970
Environment	20005	NOTIFYING RELEVANT	lan Macfarlane
Protection Licence		AUTHORITIES	Director, Assets and Operations/Mine
Number:			Operator
			0457 606 185
Premises Name and	Costins Pit Quarry	MANAGING	Gary Louie
Address:	Ridge Road	RESPONSE TO	Quarry Manager
	Coolagolite NSW 2550	POLLUTION INCIDENT	0417 288 250 or
			Deon Constance
			Quarry Supervisor
			0427 260 970
Company or business co	ontact details:	Director, Assets & Operations Group	
		Business hours contact number: (02) 6499 2222	
		After hours contact number: 0457 606 185	
		Email: recordsmailbox@begavalley.nsw.gov.au	
Scheduled activity:		Crushing, grinding or separating	
		Extractive activities	
Fee based activity:		Crushing, grinding or separating	

TRIM F16/185 Page **2** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Incident notification

Incident notification	Incident notification				
Notification of relevant authorities The persons or authorities required to be notified as per Part 5.7A of the POEO Act.	Emergency Services Police (local contact) NSW Ambulance Fire (local contact) Far South Coast Fire Control Centre - RFS Environment Protection Authority NSW Poisons Information SafeWork NSW NSW Mines Safety (Reporting) NSW Resources Regulator Senior Mine Safety Officer (Alison Guest)	000 Bermagui station: (02) 6493 4244 Bermagui station: 131 233 Bermagui station: (02) 4476 1010 6494 7400 131 555 131 126 131 050 1300 814 609 0437 836 762			
Local Authority The local authority for the area in which the premises to which the environment protection licence relates, and any area affected, or potentially affected, by the pollution. Local community and neighbour and communication procedures Owners or occupiers of present the licensed premises		(02) 6499 2222 (02) 6080 8900 132 391 A list of names and contact details for owners and occupiers of premises in the vicinity of Costins Pit is available on site and with the licensee. Affected owners and occupiers of premises are notified by mail two weeks prior to the commencement of cartage.			

TRIM F16/185 Page **3** of **16**

Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Description and likelihood of hazards

A description of the hazards to human health or the environment associated with the activity to which the licence relates

- Dust
- Noise
- Traffic Entry & Exit
- Vibration
- Extremes of weather
- Ergonomics & fatigue
- Fire
- Electrical or mechanical failure
- Drowning
- Slips, trips and falls
- Drilling, blasting and crushing
- Loading operations
- Spillage
- Pollution of water course
- Flora and Fauna
- likelihood of any such hazards occurring, including details of any conditions or events that could, or would, increase that likelihood

The hazards to human health or the environment have been identified at Costins Pit and are listed above. Control measures have been implemented to eliminate or minimise these hazards. Refer to BVSC's Costins Pit Safety Management System and BVSC's Environmental Management Plan for further information.

Refer to the BVSC Safety Management System for further information of mining hazards that have been identified, risk assessment completed for each identified hazard and systems, procedures, plans or controls that have been implemented to control the identified hazards.

TRIM F16/185 Page **4** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Pre-emptive actions to be taken

Risk	Location of Hazard	Control Measures Implemented
Dust	Haul roads Equipment operation; dozer, excavator	A water cart will be made available to wet the road if required.
	Work site	Safety glasses and dust masks are available as PPE.
	Stockpile	A portable water tank and sprinkler system is on site to wet the stockpile and working area if required.
		Airborne silica levels to be sampled by occupational hygienist upon activation of quarry.
Noise	Equipment operation; dozer, excavator, loader, truck, crusher and screener.	PPE has been provided to minimise noise exposure when operating equipment or working nearby.
		Limited use of engine compression breaking on access roads as instructed in the site induction information sheet
		Operate within the conditions of DA1991.1124.
Traffic Entry & Exit	Access road	Appropriate signage has been installed.
		The Induction covers onsite driving regulations.
	Haul roads	Daily Toolbox Talks identify temporary changes.
		Operate within the conditions of DA1991.1124.
Vibration	Equipment operation; dozer, excavator and crusher	Operate within the conditions of DA1991.1124.
Extremes of weather	Work site	PPE has been provided to minimise exposure.
Ergonomics & fatigue	Office equipment – chairs, PC's, etc. Operation of equipment; dozer, excavator – difficult working conditions Manual labour	Ensuring Workers take regular breaks whilst working in accordance with SWMS. Regular inspection to ensure the working environment meets legislation requirements.
Fire	Entire site	Ensure clearing around work site is adequate. Remove sources of ignition. Monitor bush fire activity through: PC link to RFS site App on telephone for 'Fires Near Me'. Emergency Management Instructions and the Evacuation Plan are current, displayed and understood.

TRIM F16/185 Page **5** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

		Remove flammable material from site on completion of works.
		No smoking policy is enforced on site.
		Plant is equipped with adequate fire suppression devices.
Electrical failure	Office	All electrical equipment onsite is tagged and tested in accordance with legislation.
	Portable equipment	An Electrical Equipment Register is maintained.
Mechanical failure	Plant & equipment; dozer, excavator	All mechanical equipment used onsite is checked
	Portable equipment	daily.
		Visual inspections are completed regularly.
		Plant and equipment are serviced when required and Service Records are maintained in the Workshop.
Drowning	Sediment pond	Signs are erected advising of hazard and danger.
		The Induction covers the pond dangers.
		Raised bunding surrounds all accessible areas of the pond to minimise vehicle access.
		Life buoy and safety rope are in place.
Slips, trips and falls	Stockpile	Bunding surrounds all accessible steep slopes
	Workspace	onsite to minimise access.
	Office	All areas are kept clean and clear of debris.
	Access road	Regular training will be provided to assist in managing slips, trips and falls.
	Workspace road	Signage is erected advising of dangerous areas within Costins Pit.
		Risk assessments will be completed prior to commencing work to avoid slips, trips and falls, if required.
Drilling, blasting and crushing	Work site	As per Contractor SWMS.
Loading operations	Work site	As per BVSC SWMS and SOP.
Spillage	Work site	As per BVSC's Environmental Management Plan.
Pollution of water course	Work site	As per BVSC's Environmental Management Plan.
Flora & Fauna	Workers	BVSC Safety Bulletins.
		Regular visual checks of work area.
		PPE and PPC have been provided to minimise exposure.
		Operate within the conditions of DA1991.1124.

TRIM F16/185 Page **6** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Inventory of pollutants

Inventory of pollutants

An inventory of potential pollutants on the premises or used in carrying out of the activity to which the licence relates To.

There are no hazardous chemicals or dangerous goods stored on site at Costins Pit. All vehicles that enter Costins Pit carrying hazardous chemicals or dangerous goods are also required to:

- Carry a spill kit
- Ensure all hazardous chemicals or dangerous goods are correctly labelled and stored
- Have the appropriate Safety Data Sheets (SDS) for the chemical or goods if it is required
- Carry a working, tested fire extinguisher.

When blasting at Costins Pit, the Contractor is responsible for ensuring all explosive material is labelled and stored correctly, according to their SWMS and removed from site at the end of each day.

If, at any stage, hazardous chemicals or dangerous goods are stored on site, this section of the SMS will be updated.

The maximum quantity of any pollutant/s that is likely to be stored or held at particular locations (including underground tanks) at or on the premises to which the licence relates

There are no hazardous chemicals or dangerous goods stored on site at Costins Pit.

Safety Equipment

Safety Equipment

The safety equipment or other devices that are used to minimise the risks to human health or the environment and to contain or control a pollution incident

- Duty Card System
- Emergency Management Instructions
- Emergency Evacuation Location Plan
- First Aid

Refer to BVSC's Costins Pit Safety Management System for more information

TRIM F16/185 Page **7** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Communicating with neighbours and the local community

Communicating with neighbours and the local community

• Details of the mechanisms for providing early warnings and regular updates to owners and occupiers of premises in the vicinity of the premises to which the licence relates or where the scheduled activity is carried on.

Owners and occupiers of premises in the vicinity of Costins Pit are notified by mail two weeks before the commencement of any cartage.

• Specific information that could be provided to the community so it can minimise the risk harm

Owners and occupiers of premises in the vicinity of Costins Pit are notified by mail two weeks before the commencement of any cartage.

Communicating with neighbours and the local community

• The arrangements for minimising the risk of harm to any persons who are on the premises or who are present where the scheduled activity is being carried on

The following risk management mitigation has been implemented on site. All persons must be familiar with these processes.

- The establishment of the Risk Management process
- How to identify hazards
- How to analyse the risk
- The application of the hierarchy of controls
- Steps taken to mitigate or control risks
- The ongoing requirement for constant review and consultation.


TRIM F16/185 Page **8** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

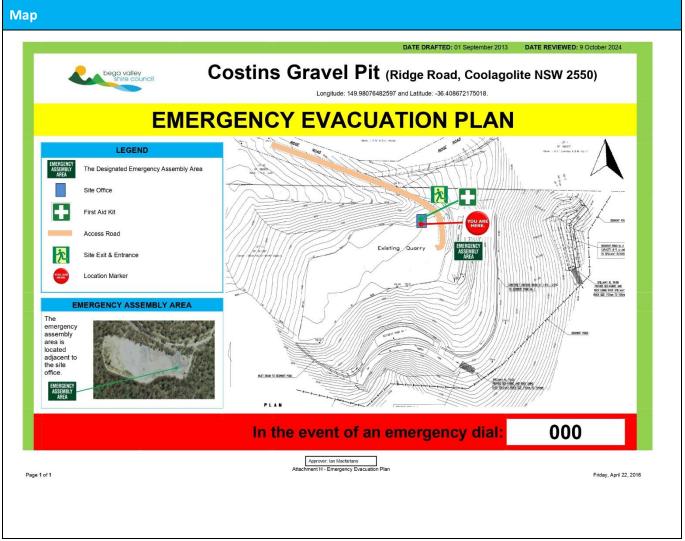

TRIM F16/185 Page **9** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Actions to be taken during or immediately after a pollution incident

Actions to be taken during or immediately after a pollution incident

Pollution control action

In the event of a significant spill of chemicals, fuels or oil

In the event of a significant slope failure resulting in landslip or dam breach

- A detailed description of the actions to be taken immediately after a pollution incident to reduce or control any pollution. These should include as a minimum early warnings, updates and actions to be taken during and after an incident.
- > Evacuate site in accordance with evacuation plan
- > Ensure all site visitors and staff are accounted for
- > Assess whether there is need for first aid or medical treatment amongst staff and visitors Call 000 for ambulance if required
- Contact Fire & Rescue 000 (Hazmat) and Director, Assets and Operations (0457 606 185 or (02)6499 2222) to advise of incident
- Deploy mobile spill kit if practicable using PPE provided in kit
- Deploy earthmoving equipment to contain spill either by bunding or by use of absorbent materials
 - If no earthmoving equipment on site ring BVSC Fleet Co-ordinator (0427 260 970) who will deploy machinery. It could be at least 2 hours before machinery arrives. Continue inspecting affected area and re-assess.
- > Isolate the affected area
- > Ensure all site visitors and staff are accounted for
- Evacuate, close & lock the site if appropriate. Place the 'Site Closed No Entry' sign on the front gate (sign located in the site office).
- Contact Director, Assets and Operations (0457 606 185 or (02)6499 2222) to advise of incident
- Deploy earthmoving equipment to contain sediment dam spill by ponding/bunding if practicable
 - If no earthmoving equipment on site ring BVSC Fleet Coordinator (0427 260 970) who will deploy machinery. It could be at least 2 hours before machinery arrives. Continue inspecting affected area and re-assess.
- Deploy pumps and draw down water level (if applicable) pumping to other storage dam(s) if practicable
- If no pumping equipment on site ring BVSC Fleet Facilities Coordinator (0427 260 970) who will deploy equipment. It could be at least 2 hours before pumps arrives. Continue inspecting affected area and re-assess.

TRIM F16/185 Page **10** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

	A detailed description of how any identified risk of harm to human health will be reduced, including (as a minimum) by means of early warnings, updates and the action to be taken during or immediately after a pollution incident to reduce that risk.	
	The Duty Card System has been adopted for use at Costins Pit for any emergency situation to reduce the risk of harm to human health within the site. This involves temporarily assigning emergency duties to any BVSC Worker in relation to the Emergency Management Plan. This system was deemed appropriate due to the limited number of BVSC Workers at Costins Pit at any one time. All Costins Pit BVSC Workers are trained to fulfil any position of the Emergency Management hierarchy. Duty Cards have been designed for each Emergency Management position and provide a basic checklist of what to do and by whom in any emergency situation. The Duty Cards for each of these positions are available in the Site Office. Safety equipment is provided to minimise risk. This includes:	
	➤ Mobile spill kits	
	Fire extinguishers	
	Fire hose reels/pump	
	▶ PPE	
	➤ First Aid kits	
	Owners and Occupiers of residents in the vicinity will be notified by door knocking, telephone and/or letterbox drops. BVSC's website and media releases will also be utilised to notify the community.	
	Refer to the Safety Management System for further information.	
	Any actions to be taken in combating the pollution caused by the incident and how any clean up and associated funding resulting from an incident will be undertaken.	
	Refer to BVSC's Environmental Management Plan for specific details in how any clean up and associated funding resulting from an incident will be undertaken	
Coordinating with persons	The procedures to be followed for coordinating with the authorities or persons that have been notified	
	The Mine Operator or person conducting business must ensure that the regulator (NSW Department of Industry, Division of Resources and Energy, Mine Safety), is notified immediately after becoming aware of a Notifiable Incident that has occurred as a result of any business or undertaking at Costins Pit.	
	Refer to BVSC's Safety Management System for further information	
	> The person/s through whom all communications are to be made	
	All communications are to be made through the Mine Operator/BVSC Director, Assets and Operations	

TRIM F16/185 Page **11** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Severe Weather Event

Actions to be taken in severe weather event				
Level 1. No severe weather event	Supervisors			
	Perform routine inspections of operational areas.			
	Workers			
	Continue operations as normal.			
Level 2. Severe weather event	Supervisors			
approaching within 30-60km	Monitor severe weather and lightning using weather apps.			
	Communicate with on-site workers distance and direction of storm.			
	Workers			
	Continue operations as normal.			
	Secure any loose items on site that could be blown around.			
Level 3. Severe weather event	Supervisors			
approaching 15-30km	Continue to monitor severe weather and lightning using weather apps.			
	Instruct all workers to remain in their vehicle or cabins of the equipment they are operating.			
	Stop all high-risk work and evacuate all mobile site offices or mobile site vans.			
	Workers			
	Continue operations as normal remaining in the cabins of the equipment.			
Level 4. Severe weather event	Supervisors			
approaching 5-15km	Continue to monitor severe weather and lightning using weather apps.			
	Instruct workers to park the equipment in a safe area and remain in the cabin.			
	Inform workers when it is safe to resume operations when the weather has passed (lightning activity greater than a distance of 15km)			
	When the weather has passed, carry out inspections on all drainage, access tracks and sediment dams.			
	Workers			
	When instructed to do so by the supervisor, all workers to shut down and isolate the equipment and remain in the cabin until safety collected by a site vehicle to be evacuated from the site.			
	Return to normal operations when instructed by the supervisor.			

TRIM F16/185 Page **12** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Staff training

Staff training

The nature and objectives of any staff training program in relation to this plan

Copies of all Workers licences and certificates of competency are held by BVSC's Employee Support Services (ESS) team. Mandatory tickets and refresher training are organised by ESS. All Workers are required to attend these training sessions, when provided.

Further corporate training is provided to Workers and is compulsory. This training may cover:

- WHS
- Hazard Identification and Reporting
- Risk Assessment
- Emergency Management procedures
- Manual Handling Procedures
- Correct use of Fire Extinguishers

All Workers at Costins Pit are inducted to site. Hazard identification and risk management processes are covered in this induction and further information is available in the Costins Pit Safety Management System.

Testing of PIRMP

Testing of PIRMP

It is a legal requirement to test the plan every 12 months and within 1 month of any pollution incident:

Detail the manner in which the plan is to be tested and maintained to ensure that the information included in the plan is accurate and up to date and the plan is capable of being implemented in a workable and effective manner. This PIRMP will be reviewed:

- Every twelve (12) months from inception of this document
- If any of the Acts or Regulations pertaining to this PIRMP are altered or change
- If a new hazard relating to pollution management has been identified and the risk is rated as Medium or High
- After an incident or accident occurs at Costins Pit
- If requested by the Mine Operator

Any review of the Costins Pit PIRMP will involve the Mine Operator as the Mine Holders representative, the quarry supervisor and all Workers who have direct involvement in the operations or activities undertaken at Costins Pit. Consultation may also include other sections of BVSC such as:

- Risk Management
- WHS
- Governance

TRIM F16/185 Page **13** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

The testing is documented and recorded (this must include the testing dates and the names of all staff

members who carried out the testina)

Date tested	Tested by	Details of test	Issues identified	Next testing date
4.9.2017	Deon Constance	Desktop simulation – review of PIRMP	Outdated contact details of neighbouring properties & BVSC contact details, emergency response map outdated	August 2018
24.10.2017	Deon Constance Richard McCrohan Graham Gregson	Updated PIRMP after practical drill undertaken. Version 2.1	Actions to be taken during of immediately after a pollution incident	August 2018
31.10.2018	Deon Constance Trudi Badullovich	Updated PIRMP after practical drill undertaken. Version 2.2	Addition information required as to location of quarry closed sign.	October 2019
9.10.2019	Deon Constance	Site Inspection, Desktop Simulation – review of PIRMP information currency	Recommendations made within Testing of Actions	October 2020
14/09/2020	Deon Constance Jessica Pestana	Site Inspection, Desktop Simulation – review of PIRMP information currency Version 2.3	Recommendations made within Testing Actions Outdated contact details of neighbouring properties & BVSC contact details, emergency response map outdated	October 2021
13/11/2021	Deon Constance Jessica Pestana	Site Inspection, Desktop Simulation – review of PIRMP information currency Version 2.4	No issues identified	November 2022
13/09/2022	Deon Constance	Site Inspection, Desktop Simulation – review of PIRMP information currency Version 2.6	No issues identified	September 2023
9/10/2024	Deon Constance Nemo Lynn	Site inspection, Desktop simulation – review of PRIMP information currency Version 2.8	No issues identified	September 2025

TRIM F16/185 Page **14** of **16**



Version: 2.8

Issued: 14.10.2024

Next review: September 2025

·

Date update occurred	Reason for update	Items updated	Updated version uploaded to website (if applicable)	Date of completion
September/ October 2017	Updated PIRMP template	All information was reviewed	Yes. Version 2.0	17.10.2017
24.10.2017	Updated PIRMP after practical drill undertaken	Actions to be taken during of immediately after a pollution incident	Yes. Version 2.1	25.10.2017
October 2018	Updated PIRMP template	All information was reviewed	Yes. Version 2.2	31.10.2018
October 2019	Updated PIRMP after site inspection and desktop simulation undertaken	All information was reviewed	Yes. Version 2.3	14.10.2019
October 2020	Updated PIRMP after site inspection and desktop simulation undertaken	All information was reviewed	Yes. Version 2.4	07.10.2020
November 2021	Updated PIRMP after site inspection and desktop simulation undertaken	All information was reviewed	Yes. Version 2.5	03.11.2022
September 2022	Updated PIRMP after site inspection and desktop simulation undertaken	All information was reviewed, owner of properties in the vicinity updated in table, Page 14	Yes. Version 2.6	13.09.2022
September 2023	Updated PIRMP	Included severe weather event actions table page 12, site inspection carried out and desk top simulation completed	Yes. Version 2.7	21.09.2023
October 2024	Updated PIRMP after site inspection and desktop simulation undertaken	Included airborne silica sampling to Preemptive measures.	Yes. Version 2.8	09.10.2024

TRIM F16/185 Page **15** of **16**

Version: 2.8

Issued: 14.10.2024

Next review: September 2025

Local community and neighbour's notification and communication procedure:

This list of property owners will be made available on site and with the licensee. It will not be made public.

Owners or occupiers of premises in the vicinity of the of the quarry, 183 Lyrebird Ridge Road COOLAGOLITE

Owners or occupiers of premises in the vicinity of the licensed premises

Owners	Property Address	Title
W.F and N.A Vipond	33 Ridge Road COOLAGOLITE	Lot: 91 DP: 580933
H.G Chapman	731 Cobargo Bermagui Road COOLAGOLITE	Lot: 2 DP: 828122
Batemans Bay Sand and Gravel Supply Pty Ltd – Southeast Quarries and Land	61 Ridge Road COOLAGOLITE	Lot: 102 DP: 734283
D.B Loth	59 Ridge Road COOLAGOLITE	Lot: 103 DP: 734283
J.R Smith and B.E Hutchins	112 Ridge Road COOLAGOLITE	Lot: 1 DP: 582577
R.R Smith	182 Lyrebird Ridge Road COOLAGOLITE	Lot: 3 DP: 789321
J.Huk and J.A Seaman	111 Lyrebird Ridge Road COOLAGOLITE	Lot: 13 DP: 811287
E.G and W.A Holub	8 Ridge Road COOLAGOLITE	Lot: 3172 DP: 705970
K.H Latter	6 Ridge Road COOLAGOLITE	Lot: 3171 DP: 705970

TRIM F16/185 Page **16** of **16**